

## CMA225 – Masking System



### Product Features:

- Self-Contained Audio Masking System
- Compact Enclosure Design
- Efficient Wide Range 8" Speakers
- Internal 25W Channel Class D Amplifier
- External 25W 70.7V Amplifier Output to Feed Other Speakers
- White Noise Analog Generators
- Variable Hi-Cut Filter
- Internal Speaker Level, External Speaker Level, Remote Level
- External UL Rated 24VDC Power Supply
- Design enables upward, downward, or horizontal orientation
- Suitable for use above suspended ceiling systems or open ceiling spaces approved for use in air handling (plenum ceilings)

### Audio Applications

- Audio Sound Masking
- Security Masking
- Pink Noise Generator
- White Noise Generator
- Amplifier


### Technical Specifications:

Model:	CMA225
Type:	Self-Contained Audio Masking System
Speaker:	8", 100Hz -100kHz
Filter Selection:	White Noise
Level Control:	Internal Speaker, External Amplifier Output, Remote Level Output
Amplifier:	Class D, 25W@70.7V 8Ω (200Ω Load)
Hi-Cut Control	Variable 2kHz – 16kHz 6dB Per Octave

Supply Voltage: UL Rated External Inline 24VDC Power Supply  
 Chassis Color: Black & White  
 Mounting: Eight Holes for Wall Mount, 2 Brackets for Suspension Mount  
 Dimensions: D 11.81" (300mm) x H 4" (102mm) x D11.81" (300mm)  
 Weight: 10 lbs. (4.54kg)

Application:

- Government Buildings
- Medical Facilities
- Office Environments
- Churches
- Restaurants
- Schools
- Industrial Facilities

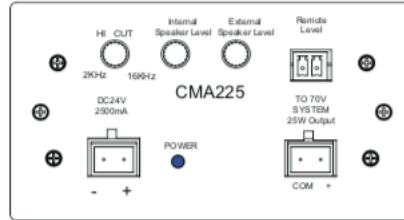

CMA225+CSQ8VR Sound Masking system

