

## W0508 – Wall-mounted Loudspeaker




### Product Description:

The W0508 Speaker has a 50W power handling capability at 8 ohms to provide a strong performance. Featuring a 25W transformer with multiple power taps for use with 70V systems for wide compatibility with a variety of sound systems. The cabinet is made with injection-molded UV-protected ABS for long term durability and low resonance for great clarity. A powder-coated aluminum grille and mounting bracket allows for long-term use. The mounting bracket features hemispherical swivel mounting for easy installation and audio positioning of the speaker.

### Technical Specifications:

Model:	W0508
LF Driver:	130mm PP Cone
HF Driver:	32mm Dome
Peak Power:	50W
RMS Power:	25W
Power input:	25W @ 70V/100V
Frequency Response:	60Hz-20kHz
Sensitivity (1W/1m):	87 dBspl
Impedance:	8Ω
Dimensions:	Φ280mm x 180mm x 200mm
Enclosure Material:	ABS
Finish:	Powder-Coated
Weight:	3.0 kg

**SPL:**

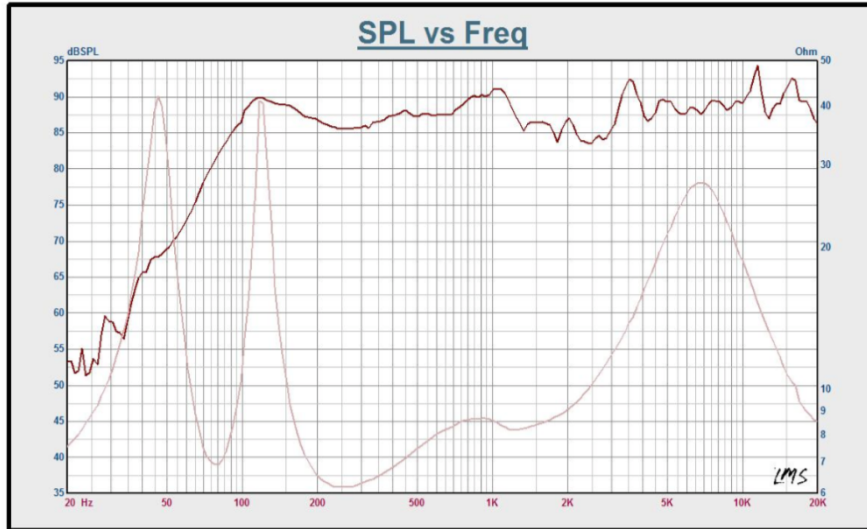

### **W0608 – Wall-mounted Loudspeaker**




#### **Product Description:**

The W0608 Speaker has a 60W power handling capability at 8 ohms to provide a strong performance. Featuring a 30W transformer with multiple power taps for use with 70V systems for wide compatibility with a variety of sound systems. The cabinet is made with injection-molded UV-protected ABS for long term durability and low resonance for great clarity. A powder-coated aluminum grille and mounting bracket allows for long-term use. The mounting bracket features hemispherical swivel mounting for easy installation and audio positioning of the speaker.

## Technical Specifications:

Model:	W0608
LF Driver:	150mm PP Cone
HF Driver:	32mm Dome
Peak Power:	60W
RMS Power:	30W
Power input:	30W @ 8 Ohm
Frequency Response:	60Hz-20kHz
Sensitivity (1W/1m):	86 dBspl
Impedance:	8Ω
Dimensions:	Φ320mm x 200mm x 230mm
Enclosure Material:	ABS
Finish:	Powder-Coated
Weight:	4.147 kg

## SPL:

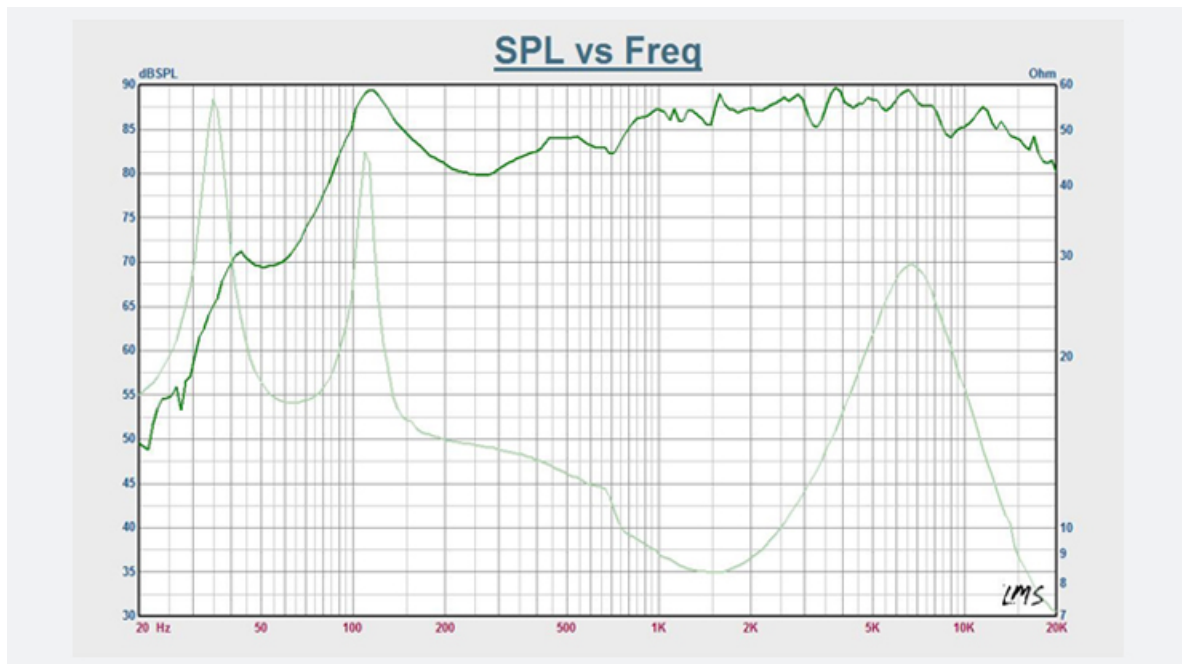

## W0808 – Wall-mounted Loudspeaker



### Product Description:

The W0808 Speaker has a 100W power handling capability at 8 ohms to provide a strong performance. Featuring a 50W transformer with multiple power taps for wide compatibility with a variety of sound systems. The cabinet is made with injection-molded UV-protected ABS for long term durability and low resonance for great clarity. A powder-coated aluminum grille and mounting bracket allows for long-term use. The mounting bracket features hemispherical swivel mounting for easy installation and audio positioning of the speaker.

### Technical Specifications:

Model:	W0808
LF Driver:	8 inches
HF Driver:	1 inch
Peak Power:	100W
RMS Power:	50W
Power input:	50W @ 8 ohm
Frequency Response:	40Hz-20kHz
Sensitivity (1W/1m):	86 dBspl
Impedance:	8Ω
Dimensions:	Φ450mm x 275mm x 270mm
Enclosure Material:	ABS
Finish:	Powder-Coated
Weight:	7.568 kg

SPL:

